




Etanchéité optimale pendant  
la douche et à l'ouverture des  
portes.



SRV2-S 2 panneaux par côté

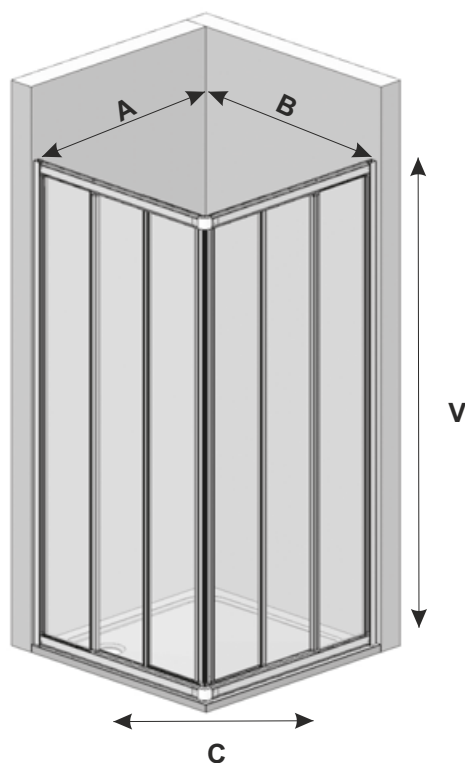

| TYPE                  | A         | B         | C   | V    |
|-----------------------|-----------|-----------|-----|------|
| SRV2-S 75 + SRV2-S 75 | 720 - 740 | 720 - 740 | 396 | 1950 |
| SRV2-S 80 + SRV2-S 80 | 770 - 790 | 770 - 790 | 431 | 1950 |
| SRV2-S 90 + SRV2-S    | 870 - 890 | 870 - 890 | 504 | 1950 |
| SRV2-S 100 + SRV2-S   | 970 - 990 | 970 - 990 | 530 | 1950 |
| SRV2-S 75 + SRV2-S    | 720 - 740 | 870 - 890 | 454 | 1950 |

